

KEYNOTE LEGEND (#)

1. [Hatched pattern] SIGNIFIES AREA OF ROOF TO BE REPLACED IN PHASE 01.
2. [Dotted pattern] SIGNIFIES DIFFERENT LEVEL OF AREA OF ROOF TO BE REPLACED IN PHASE 01 (INDICATED ON S121).
3. [Diagonal lines] SIGNIFIES AREA OF ROOF TO BE REPLACED IN PHASE 02.
4. EXISTING MEMBRANE ROOF SUPPORTED BY EXISTING CONCRETE WAFFLE SLAB. VIF EXISTING CONCRETE TO REMAIN. REFER TO ARCHITECTURAL DRAWINGS FOR ROOFING REPLACEMENT INFORMATION.

GENERAL NOTES

1. (E) ROOFING TO BE REMOVED TO ACCOMMODATE INSTALLATION OF REPLACEMENT ROOFING SYSTEM. REFER TO ARCHITECTURAL DRAWINGS FOR INFORMATION.
2. (E) CONCRETE WAFFLE SLAB CONSISTS OF 52" x 52" SQUARE DOMES WITH A 4-1/2" SLAB AND 8" WIDE x 14" DEEP RIBS AT 5'-0" ± O.C., TYP.
3. FIELD VERIFY (E) STRUCTURE AND CONDITIONS PRIOR TO DEMOLITION AND REPLACEMENT OF ROOF.

STRUCTURAL ELEVATIONS

- T/3RD FLOOR EL. 55'-1" UNO, VIF

#	DATE	DESCRIPTION
01	2023.08.21	PERMIT & CONSTRUCTION
02	2023.12.11	PERMIT RESPONSE


ORLANDO PUBLIC LIBRARY SYSTEM
DOWNTOWN LIBRARY REROOF
 101 E. Central Blvd, Orlando, Florida 32801

PARCEL ID - 25-22-29-3140-04-040



ARCHITECTS
 839 N MAGNOLIA AVE
 ORLANDO, FL 32803
 #AR93580
 KMFARCHITECTS.COM
 407.298.1988

TLC ENGINEERING SOLUTIONS
 7370 Cabot Court, Suite 103
 Melbourne, FL 32940
 P 321.636.0274
 COA 15
 www.tlc-engine.com
 TLC No.: 522209
 THINK. LISTEN. CREATE.

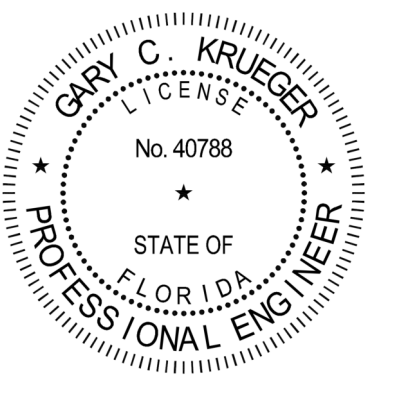

GARY C. KRUEGER
 FL LICENSE # 40788

PROJECT # 2215.03
 DATE: 2023.08.21

THIRD FLOOR
ROOF PLAN

1 THIRD FLOOR ROOF PLAN - EAST
 1" = 10'-0"